

The Viking Corporation, 210 N Industrial Park Drive, Hastings MI 49058

Telephone: 269-945-9501 Technical Services: 877-384-5464 Fax: 269-818-1680 Email: techsvcs@vikingcorp.com

Visit the Viking website for the latest edition of this technical data page www.vikinggroupinc.com

1. TESTING

Viking's Electroless Nickel PTFE (ENT)¹ finish has been investigated for installation in corrosive environments and is cULus Listed as corrosion resistant and FM Approved as corrosion proofing for installation in corrosive environments as indicated in the appropriate sprinkler technical data pages.

ENT¹ coated Viking sprinklers have successfully undergone the UL 199 30-Day corrosion test.

- 30 day 20% salt fog
- 30 day moist hydrogen sulfide air mixture test
- 30 day moist CO₂-sulfur dioxide air mixture test.

After completion of the 30-day exposure test, ENT coated sprinklers were subjected to an oven heat sensitivity test to verify sprinkler functionality and operating time.

¹ ENT is not suited for environments containing ferric chloride. Ferric Chloride is commonly used in indoor swimming pool areas as a PH level balancer. Contact Viking Technical Services for questions or additional information.


2. DURABILITY

Viking ENT Sprinklers are more durable and long-lasting compared to other alternatives. The coating has a uniform thickness on all surfaces including the waterway. The ENT finish is an alloy of nickel and phosphorous and the belleville spring is manufactured from a nickel alloy then coated on both sides with polytetrafluoroethylene (PTFE) tape which adds to the durability of the sprinkler. The ENT plating is applied using an autocatalytic process that creates a uniform coating on all surfaces without the use of electricity leading to a durable bond with the base material. The final product provides increased resistance to scratching, chipping and flaking.

3. POSSIBLE APPLICATIONS

In addition to decorative applications, the corrosion resistant properties of the Electroless Nickel PTFE coating excel in these recommended occupancies.

- Parking Garages
- Salt Air Areas
- Certain Industrial Wash Down Areas

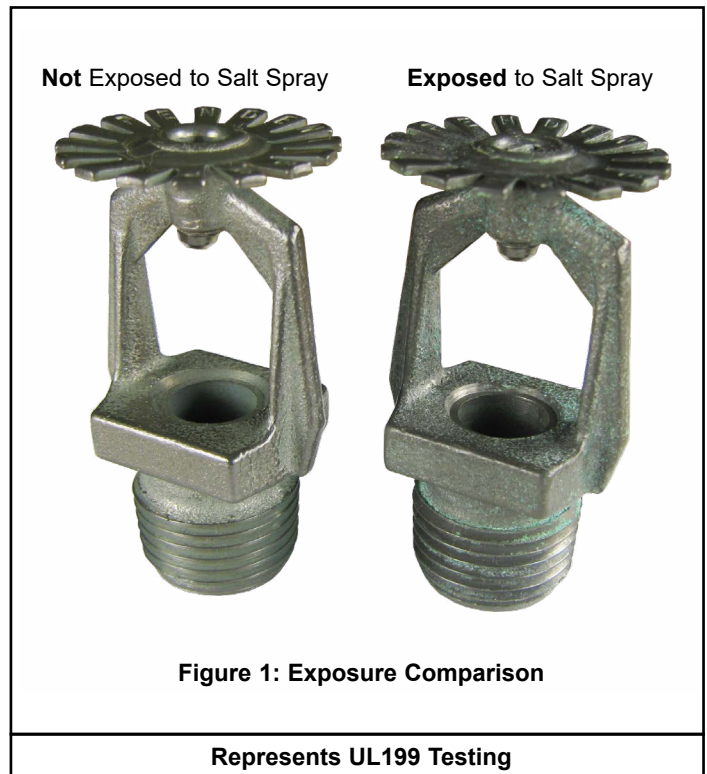

WARNING: Cancer and Reproductive Harm-
www.P65Warnings.ca.gov

